


Sensational Neatflex

- the 18mm range of bending substrates

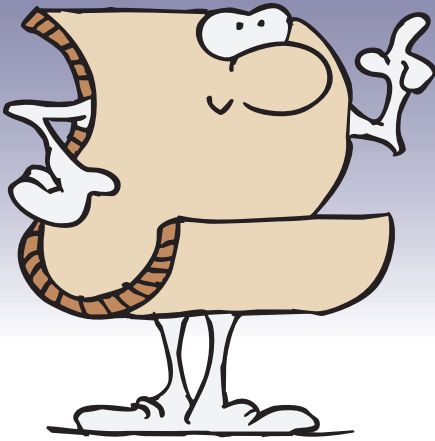

Build custom curves with the performance characteristics you need for your project

- Moisture Resistant •
- Lightweight •
- Impact resistant •
- Fire retardant •
- FSC Certified •

Go Green with Neatflex pip

Made from MOISTURE RESISTANT MDF faced with PolyBak. The cost effective way to create one-piece 18mm custom curves with the added benefit of moisture resistance.

NEATFLEX®
bendy pip

Go Lite with Neatflex bendy ply

45% less weight than standard MDF with all the benefits of Poplar Plywood. Neatflex Ply is the original 18mm product in the Neatflex family.

NEATFLEX®
bendy ply


Go Red with Neatflex PIP fire retardant†

Class A material, Neatflex FR faced with Polyback is ideal for applications in public buildings such as schools, hospitals, casinos and theatres where risk-assessment or specification determines that fire retardant materials should be used. Made to Order.

NEATFLEX
fire retardant


18mm Product Summary - Neatflex

Product	Board size	Orientation	Performance characteristic	Nominal Thickness	Weight
Neatflex Ply	1220 x 2440	Cross Cut	Lightweight	18mm	23 kilos
Neatflex PIP*	1220 x 2440	Cross Cut	Moisture Resistant	18mm	34 kilos
Neatflex PIP*	2440 x 1220	Long Cut	Moisture Resistant	18mm	34 kilos
Neatflex PIP FR*	1220 x 2440	Cross Cut	Fire Retardant	18mm	34 kilos

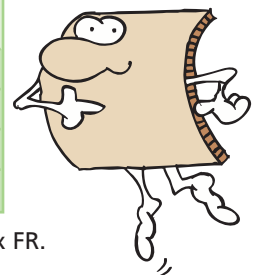

† Visit www.neatconcepts.com/fire for a copy of the Southwest Research Institute fire test report on Neatflex FR.

Neatform - the 6mm and 9mm range of bending substrates

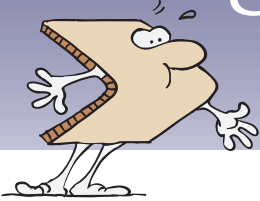

Made exclusively from 6mm and 9mm thick, 80% FSC Certified MDF, Neatform is perfect for creating custom curves.

Neatform curves are whatever you want them to be

framed and frameless, lightweight, tough, smooth, paintable, laminated, veneered


Material Benefits

- Ready to paint and stain
- Consistent thickness and bending capability
- Excellent seam hiding qualities
- Follows intended curves without bumps and hollows
- Repeatability is great and results are predictable


NEATFORM[®]
bendy mdf

6mm & 9mm Product Summary - Neatform Bendy MDF

Board size	Orientation	Face	Nominal Thickness	Weight
1220 x 2440	Cross Cut	Sanded – 120 grit	6mm	10.6 kgs
2440 x 1220	Long Cut	Sanded – 120 grit	6mm	10.6 kgs
1220 x 2440	Cross cut	Sanded – 120 grit	9mm	15.1 kgs
2440 x 1220	Long cut	Sanded – 120 grit	9mm	15.1 kgs



2440 x 1220
Long-Cut
Column Wrap

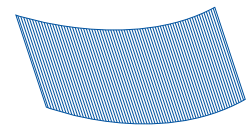

1220 x 2440
Cross - Cut
Barrel Wrap

Neatform and Neatflex Radius Chart

Product	Nominal Thickness	Minimum Radius*	Minimum Diameter*
Neatform	6mm	100mm – 150mm	200mm – 300mm
Neatform	9mm	150mm – 200mm	300mm – 400mm
Neatflex	18mm	250mm – 300mm	500mm – 600mm

* Minimum radii and diameters vary with temperature, humidity and any surface materials such as veneer or laminate applied to the surface before bending.

All Neatform and Neatflex products are made from a combination of 80% FSC Certified MDF, plywood and PolyBak, which is Greenguard certified in the USA.



Neat Concepts FSC
Chain of Custody
No. TT-COC-1958

Distributor

Email: info@neatconcepts.com
or telephone 020 8807 5805
Web site: www.neatconcepts.com